MNHO-138

12th Gen Intel® i5-1235U 1 LAN, 3 USB, Wifi/5G WWAN Rugged Industrial Tablet


₱ https://www.pondesk.com/product/MNHO-138

Features

- High-Performance Rugged Industrial Tablet
- Powered by 12th gen Intel® Core™ i5-1235U (10 Core, 4.40 GHz, 15W)
- 16 GB LPDDR5 (up to 32 GB, optional)
- 256 GB NVMe PCle SSD (up to 1 TB, optional)
- Offers 11.6" FHD (1920 x 1080), 1,000 nits display & 7h gorilla glass
- 3x USB (2x 3.2 Type-A, 1x Type-C),
- 1x LAN, 2x COM (1x RS232/422/485, 1x RS232, optional)
- 5MP Front Camera (Fixed Focus) & 12MP Rear Camera (Auto Focus)
- Connectivity options include Wi-Fi 6E, 5G/4G, Bluetooth 5.3, and GNSS
- Offers high capacity dual hot-swappable battery design for smooth performance
- Offers built-in sensors (G-sensor, Light sensor, Gyroscope)
- Integrated 1D/2D barcode reader, NFC, RFID, fingerprint reader
- IP66 and MIL-STD-810H certified



9/0 Interfaces

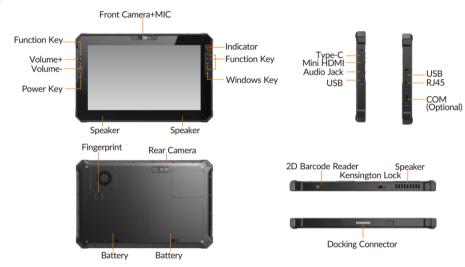

Specifications

Processor

11th Gen Intel Core™ i5-1235U processor

Memory 16 GB LPDDR5 (up to 32 GB, optional)

256 GB NVMe PCIe SSD (up to 1 TB, optional)

Display

1x Mini HDMI

Connectivity options include Wi-Fi 6E, 5G/4G, Bluetooth 5.3, and GNSS

I/O Interfaces

2x USB 3.0 Type-A 1x Type-C (supports power & data transfer)
2x COM (1x RS232/422/485,1x RS232, optional) 1x RJ45 10/100/1000M 1x Nano SIM card slot Camera: 2MP fixed focus camera

12MP autofocus camera with flash Sensor: G-sensor, Light sensor, Gyroscope Docking Connector: 1x 24 pin

1x 3.5 mm audio combo jack Speaker: 80/2W, dual stero speakers MIC: Dual microphone

Data Collection (Optional)

Fingerprint 1D, 2D barcode reader UHF: PR9200/R2000

os

Support Windows 10/11 Support Linux

DC Input: 100-240V, 50Hz-60Hz, 65W Battery: Dual batteries, hot-swappable, 7.7V 58Whr, with battery indicator Battery: 6 hours

Environment

Operating Temperature: -20 $^{\circ}$ C to 60 $^{\circ}$ C Storage Temperature: -30 °C to 70 °C Relative Humidity: 95% @ 40°C (Non-condensing)

Dimensions (W x D x H): 315 x 203 x 20 mm Weight (N.W.): 1550 g (3.42 lbs)

Certification

Vibration & Drop: MIL-STD-810H CE, FCC, RoHS, UKCA

Dimensions



315mm x 203mm x 20mm



- sales@pondesk.com, sales@picopc.co
- United Kingdom